


PLAN VIEW

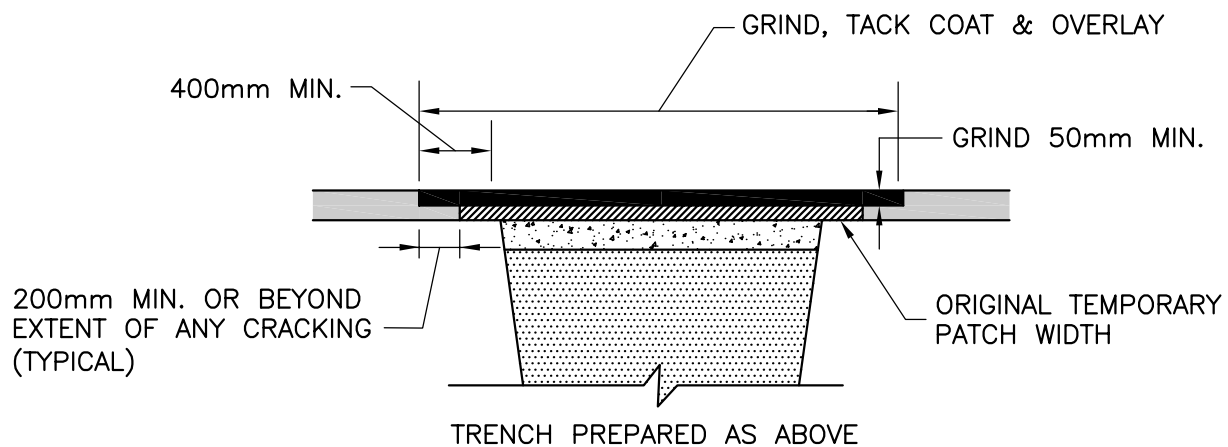

CROSS SECTION

NOTES:

1. AFTER 3 MONTHS OR AS DIRECTED BY ENGINEER
2. MINIMUM WIDTH OF TRANSVERSE PAVEMENT CUTS IS 3m
3. MINIMUM WIDTH OF LONGITUDINAL PAVEMENT CUTS DETERMINED BY PERMANENT PATCHING REQUIREMENTS
4. REFER TO CS-R-9 FOR TEMPORARY TRENCH PAVEMENT RESTORATION REQUIREMENTS
5. ANY TRANSVERSE PAVEMENT CUTS WITHIN 8m OF EACH OTHER SHALL BE INCORPORATED INTO ONE PATCH
6. BORE HOLES FOR GEOTECHNICAL WORKS SHALL BE PERMANENTLY PATCHED WITH HOT MIX AND PLACED IN A DIAMOND SHAPE

**PERMANENT UTILITY TRENCH  
PAVEMENT RESTORATION  
(LONGITUDINAL OR TRANSVERSE)  
(UNDER REVIEW)**



DRAWN: 2014 10 30

REVISED:

APPROVED BY:

CS - R - 16