
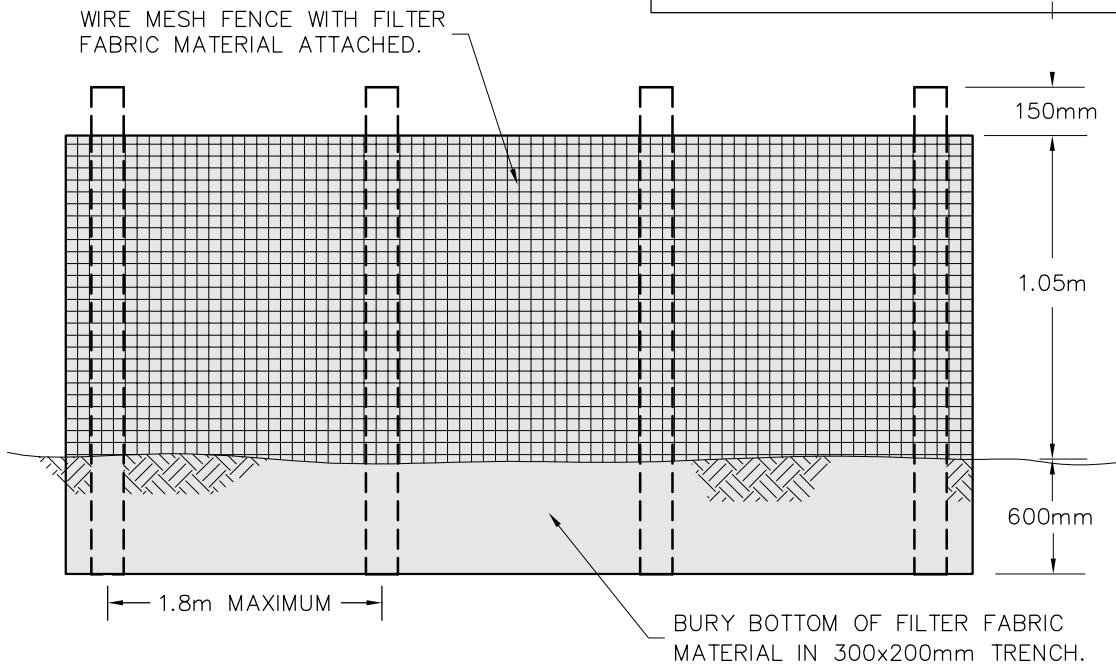


TYPICAL CROSS SECTION

JOINT OVERLAPPING DETAIL:

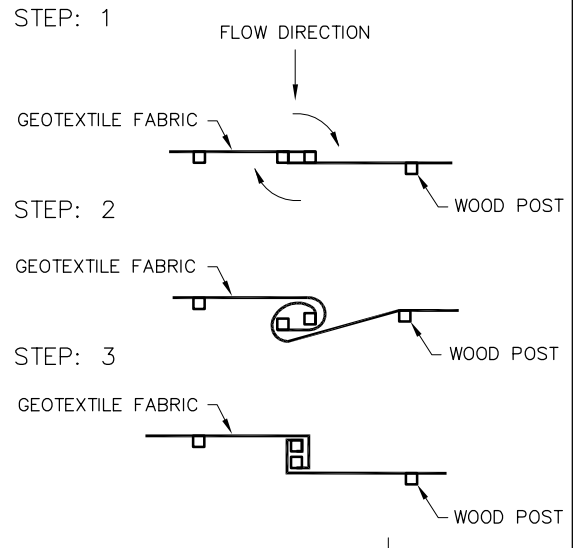

ELEVATION

NOTES:

1. PURPOSE IS TO INTERCEPT AND RETAIN TRANSPORTED SEDIMENT BY DISSIPATING ENERGY OF WATER FLOW AND CAUSING SEDIMENT TO SETTLE OUT.
2. INSTALL THE FENCE ALONG SLOPE CONTOURS.
3. TERMINATION POINTS SHOULD EXTEND UPHILL ONE FULL SECTION TO PREVENT WATER FROM RUNNING AROUND THE ENDS.
4. FENCE SHALL NOT BE INSTALLED ON SLOPES STEEPER THAN 2:1.
5. JOINTS IN FILTER FABRIC SHALL BE SEALED BY OVERLAPPING AND ROTATING THE TWO ENDS TOGETHER.
6. REMOVE SEDIMENT WHEN IT REACHES 1/3 FENCE HEIGHT.

SILT FENCE



DRAWN: 2004 06 16

REVISED: 2010 07 26

APPROVED BY:

ES - EC - 4